


REDUÇÃO CONCÊNTRICA E EXCÊNTRICA

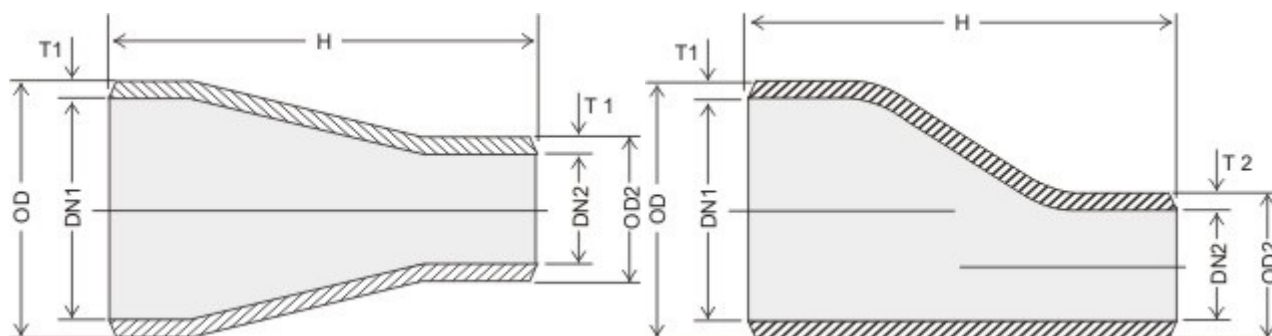

Diâmetros nominais						Comprimento	Peso aproximado	
							Std. W	X-S
DN1	DN2					H	Pounds	Pounds.
						Polegadas	Quilos	Quilos
						Milímetros	Quilos	Quilos
3/4	1/2	3/8				1 1/2	0.15	0.22
						38,1	0,068	0,100
1	3/4	1/2	3/8			2	0.28	0.36
						50,8	0,127	0,163
1 1/4	1	3/4	1/2			2	0.38	0.50
						50,8	1,72	0,227
1 1/2	1 1/4	1	3/4	1/2		2 1/2	0.57	0.76
						63,5	0,258	0,345
2	1 1/2	1 1/4	1	3/4		3	0.90	1.25
						76,2	0,408	0,567
2 1/2	2	1 1/2	1 1/4	1		3 1/2	1.70	2.23
						88,9	0,771	1,01
3	2 1/2	2	1 1/2	1 1/4		3 1/2	2.2	2.99
						88,9	1,00	1,36
3 1/2	3	2 1/2	2	1 1/2	1 1/4	4	3.0	4.16
						101,6	1,36	1,89
4	3 1/2	3	2 1/2	2	1 1/2	4	3.6	5.00
						101,6	1,63	2,27
5	4	3 1/2	3	2 1/2	2	5	6.1	8.65
						127	2,77	3,92
6	5	4	3 1/2	3	2 1/2	5 1/2	8.7	13.10
						139,7	3,95	5,94
8	6	5	4	3 1/2		6	14.3	21.7
						152,4	6,49	9,84
10	8	6	5	4		7	23.6	31.9
						177,8	10,7	14,5
12	10	8	6	5		8	33.1	43.6
						203,2	15,0	19,8
14	12	10	8	6		13	59.2	78.3
						330,2	26,8	35,5
16	14	12	10	8		14	73.0	97.0
						355,6	33,1	44,0
18	16	14	12	10		15	88	117
						381	39,9	53,1
20	18	16	14	12		20	131	174
						508	59,4	78,9
22	20	18	16	14		20	144	191
						508	65,3	86,6
24	20	18	16			20	158	210
						508	71,7	95,22